

RKP2417K

2U Dual Slide 17" 4K LCD Console Drawer



Benefits

- ▶ 2U 17" 4K LCD console drawer
- ▶ Dual slide - LCD and keyboard slide independently
- ▶ 3840 x 2160 native resolution / 16.7M colors (8-bit)
- ▶ 1920 x 1080 & 1920 x 1200 resolution support
- ▶ Display port 1.2 video input / USB KB / MS
- ▶ 104-key keyboard with either touchpad or trackball
- ▶ Built-in dual stereo speakers
- ▶ Short depth design of 480mm
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)

Options

- HDMI 2.0 video input
- 3G / HD / SD-SDI Broadcast-grade input
- DC power : 12V / 24V / 48V / 125V
- MAC or SUN Micro keyboard options available
- Touchscreen : Projected Capacitive 10-pt / Resistive 1-pt

Product Specifications

Console Port

Video input	Display port 1.2
KB / MS	USB type B
DP console 6ft cable : CP-6	Drawer end : DP + USB type B (KB / MS) Server end : DP + USB type A

LCD Panel

Panel size (diagonal)	17.3"
Native resolution	3840 x 2160
Brightness (cd/m ²)	400
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	30
Dot pitch (mm)	0.0995
Display area (mm)	382.12H x 214.94V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	20,000

Physical

Product (W x D x H)	Single console	442 x 480 x 88 mm 17.4 x 18.9 x 3.5 inch
	Console w/ KVM	442 x 480 x 88 mm 17.4 x 18.9 x 3.5 inch
Packing (W x D x H)	Single console / Console w/ KVM	585 x 620 x 190 mm 23 x 24.4 x 7.5 inch
Net weight	Single console	20.4 kg / 44.9 lb
	Console w/ KVM	21.1 kg / 46.4 lb
Gross weight	Single console	24.8 kg / 54.6 lb
	Console w/ KVM	27 kg / 59.4 lb

Mounting Distance

Single console drawer / Console w/ KVM drawer	490 ~ 700 mm 19.3 ~ 27.6 inch
--	----------------------------------

Video Option

Digital	HDMI	HDMI 2.0 / HDCP 2.2
---------	------	---------------------

Audio Option

Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 29W / Max. 38W
	Power saving mode	Max. 9W / Max. 18W
	Power button on	Max. 2W / Nil

Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance

EMC	FCC & CE certified
Safety	CE / LVD certified
Environment	RoHS2 & REACH compliant

RKP2417K models w/ KVM


DP KVM		Remote	12-port
	0	0	RKP2417K - 1201P


DP USB KVM Cable	
Resolution	16:10 - max. 1920 x 1200
Support :	16:9 - max. 3840 x 2160
	4:3 - max. 1600 x 1200
** Resolution related to LCD specification	
 CP - 6 (6 ft)	

Standard Keyboard

Ge


G keyboard integrated with touchpad

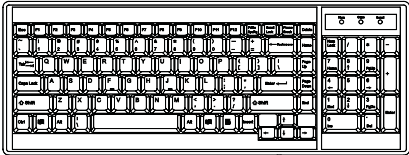



Gb

G keyboard integrated with trackball

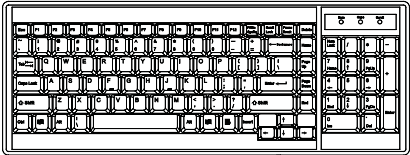



Supporting layouts	
America	 United States
EMEA	 United Kingdom
	 Germany
	 France
	 Spain
	 Norway
Asia	 Italy
	 Russia
	 Switzerland
	 Netherlands
	 Portugal
Asia	 China
	 Japan
	 Korea
	 Arabia
	 Turkey

Keyboard Options

* US layout only

Me

Mac keyboard with touchpad



Se

S keyboard with touchpad



Mb

Mac keyboard with trackball



Sb

S keyboard with trackball



